



**TIF™100-30-11S Series** thermally conductive interface materials are applied to fill the air gaps between the heating elements and the heat dissipation fins or the metal base. Their flexibility and elasticity make them suited to coat very uneven surfaces. Heat can transmit to the metal housing or dissipation plate from the heating elements or even the entire PCB, which effectively enhances the efficiency and life-time of the heat-generating electronic components.

**Features**


- » Good thermal conductivity: **3.0 W/mK**
- » Naturally tacky needing no further adhesive coating
- » Soft and Compressible for low stress applications
- » Available in varies thickness

**Application**


- » Cooling components to the chassis of frame
- » Set Top Box
- » Car Battery & Power Supply
- » Charging Pile
- » LED TV/ Lighting
- » Graphics Card Thermal Module

Typical Properties of TIF™100-30-11S Series		
Color	Gray	Visual
Construction	Ceramic filled silicone	*****
Thickness range	0.020"(0.5mm)~0.200" (5.0mm)	ASTM D374
Hardness	45 Shore 00	ASTM 2240
Specific Gravity	3.0 g/cc	ASTM D297
Operating Temp	-40 ~160 °C	*****
Dielectric Breakdown Voltage	>5500 VAC	ASTM D149
Dielectric Constant@1MHz	5.0 MHz	ASTM D150
Volume Resistivity	1.0X10 <sup>12</sup> Ohm-meter	ASTM D257
Thermal Conductivity	3.0 W/mK	ASTM D5470
	3.0 W/mK	GB-T32064
Outgassing (TML)	0.40%	ASTM E595
Flame Rating	94 -V0	UL E331100

**psi. vs. Thermal Resistance**

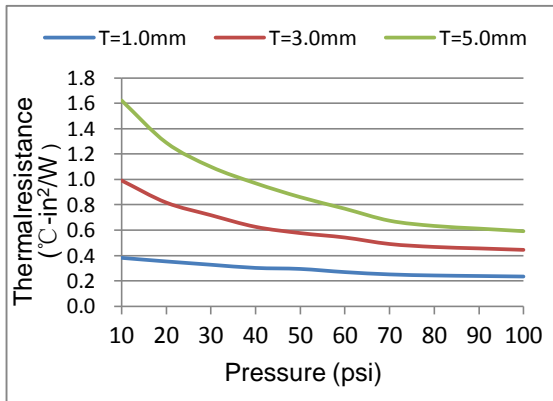

**psi. vs. Compression Ratio**

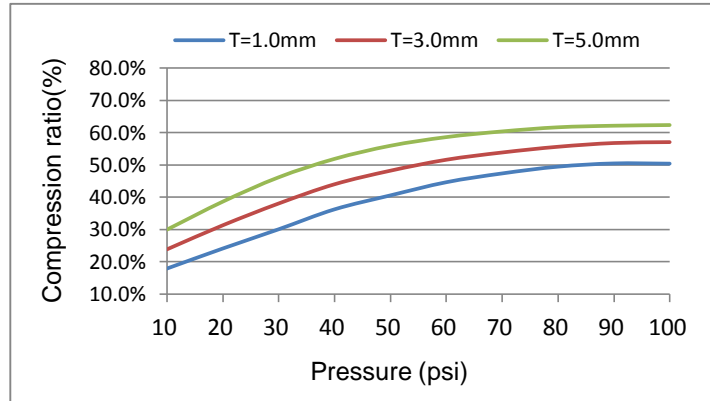

**Product Identification:**

TIF1 00 FG - 30 - 11 S - NS1 - A1

- Product Number ← TIF1
- Thickness: 20-200mils ← 00
- FG: With Fiberglass ← FG
- Thermal Conductivity: 3.0W/mK ← 30
- Product Size: 8" x 16" ← 11
- Hardness: S-Soft ← S
- NS1: Single sided coating ← NS1
- A1: Adhesive on one side ← A1
- Color: 11 (Gray) ← 11

Application Technology Download  
Thermal Conductive Interface Materials



<http://www.ziitek.com>

**Product Specification**

**Product Thicknesses:** 0.020-inch to 0.200-inch (0.5mm to 5.0mm)    **Product Sizes:** 8" x 16"(203mm x406mm)

Individual die cut shapes and custom thickness can be supplied. Please contact us for

[Thermally Conductive Materials](#)    [Heat Generating Materials](#)    [Thermally Conductive Plastics](#)    [Foaming Silica Gel](#)

**Canada:**

Tel:+001-604-2998559  
E-mail: sales@thermazig.com

**China:**

Tel: +86-769-38801208  
E-mail: frances@ziitek.com.tw

**Taiwan:**

Tel:+886-2-22771007  
E-mail:frances@ziitek.com.tw

The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein.